
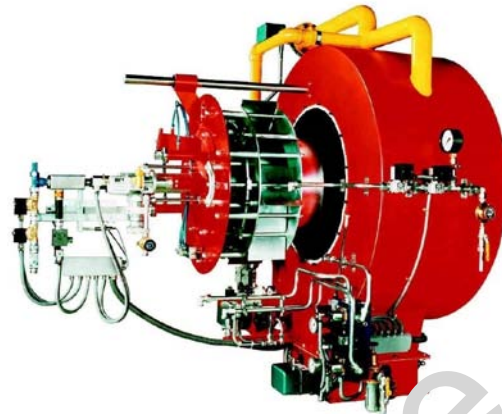


**Diesel oil low NOx burner**

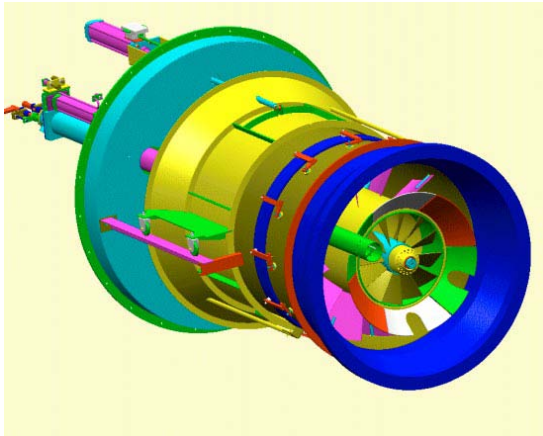

General Flame

**Introduction to diesel oil low NOx burner:**

Diesel oil low NOx burner is an industrial burner using low NOx technology, its main fuel is diesel oil. Low NOx burner, by adjusting the combustion air and combustion head, can obtain the best combustion parameters.

**Technical and performance characteristics:**

- Single stage fire, two stage fire, two stage fire progressive/proportional adjustment
- Can adapt to any type of combustion chamber.
- Air and fuel gas are mixed at the combustion head.
- The best combustion parameters can be obtained by adjusting the combustion air and combustion head.
- No need to remove the burner from the boiler, you can directly take off the mixing device, so as to facilitate maintenance.
- The use of servo motor for the first and second stage of air flow regulation, and when the burner stops running, the damper is closed to reduce heat loss in the furnace.
- A sealing control device valve can be added to the valve group.
- A flange and an insulating sealing ring are used to connect and fix the boiler; Equipped with a 4-hole and 7-hole coupler.
- The length of the blast pipe is optional.



Address: No.3, Yima Road, Guangling industrial zone, Guangling Dist., Yangzhou  
 地址：江苏省扬州市广陵区广陵产业园意马路3号  
 TEL(电话): (86)-514-82131016  
 MOB(手机): (86)-13375276917  
 E-MAIL(邮箱): [generalfume1@163.com](mailto:generalfume1@163.com)

FAX(传真): (86)-514-82131026  
 ZIP(邮编): 225004